

# ChromHeatMap

Tim F. Rayner

October 7, 2025

Cambridge Institute of Medical Research

## 1 Introduction

The **ChromHeatMap** package provides functions for visualising expression data in a genomic context, by generating heat map images in which data is plotted along a given chromosome for all the samples in a data matrix.

These functions rely on the existence of a suitable **AnnotationDbi** package which provides chromosome location information for the probe- or gene-level identifiers used in your data set. The data themselves must be in either an **ExpressionSet**, or a data matrix with row names corresponding to probe or gene identifiers and columns corresponding to samples. While the **ChromHeatMap** package was originally designed for use with microarray data, given an appropriate **AnnotationDbi** package it can also be used to visualise data from next-generation sequencing experiments.

The output heatmap can include sample clustering, and data can either be plotted for each strand separately, or both strands combined onto a single heat map. An idiogram showing the cytogenetic banding pattern of the chromosome will be plotted for supported organisms (at the time of writing: *Homo sapiens*, *Mus musculus* and *Rattus norvegicus*; please contact the maintainer to request additions).

Once a heat map has been plotted, probes or genes of interest can be identified interactively. These identifiers may then be mapped back to gene symbols and other annotation via the **AnnotationDbi** package.

## 2 Data preparation

Expression data in the form of a data matrix must initially be mapped onto its corresponding chromosome coordinates. This is done using the `makeChrStrandData`:

```
> library('ALL')
> data('ALL')
> selSamples <- ALL$mol.biol %in% c('ALL1/AF4', 'E2A/PBX1')
> ALLs <- ALL[, selSamples]
> library('ChromHeatMap')
> chrdata<-makeChrStrandData(exprs(ALLs), lib='hgu95av2')
```

The output *chrdata* object here contains the expression data indexed by coordinate. Note that the `makeChrStrandData` function is based on the `Makesense` function in the **geneplotter** package, removing the internal call to `lowess` to avoid smoothing the data (which is undesirable in this case). The `makeChrStrandData` function is used specifically because it incorporates information on both the start and end chromosome coordinates for each locus. This allows the `plotChrMap` function to accurately represent target widths on the chromosome plot.


### 3 Plotting the heat map

Once the data has been prepared, a single call to `plotChrMap` will generate the chromosome heat map. There are many options available for this plot, and only a couple of them are illustrated here. Here we generate a whole-chromosome plot (chromosome 19), with both strands combined into a single heat map:

```
> groupcol <- ifelse( ALLs$mol.biol == 'ALL1/AF4', 'red', 'green' )
> plotChrMap(chrdata, 19, strands='both', RowSideColors=groupcol)
```


ChrMapPlot

Number of features plotted: 157

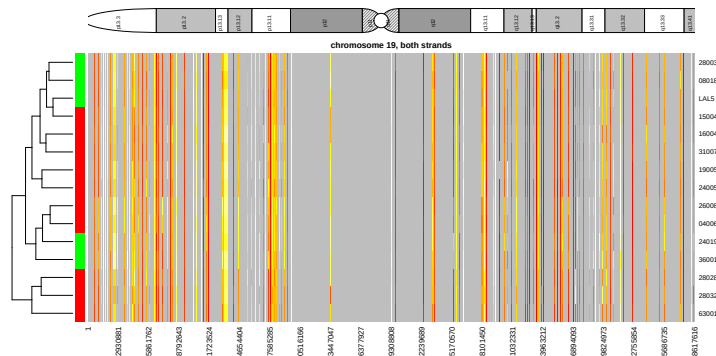

Chromosomes can be subsetted by cytoband or start/end coordinates along the chromosome. The following illustrates how one might plot the strands separately (this is the default behavior):

```
> plotmap<-plotChrMap(chrdata, 1, cytoband='q23', interval=50000, srtCyto=0, cexCyto=1.2)
```

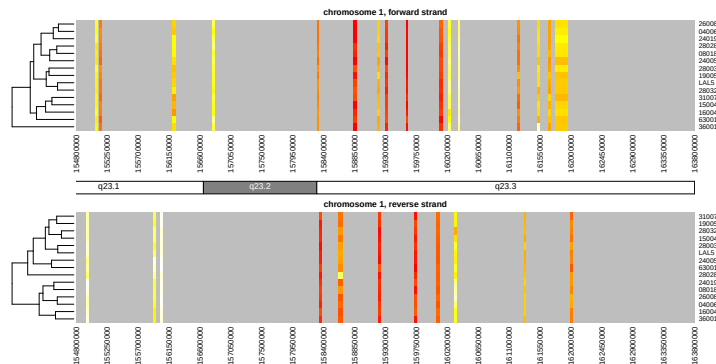

Other options include subsetting of samples, adding a color key to indicate sample subsets, deactivating the sample-based clustering and so on. See the help pages for `plotChrMap` and `drawMapDendro` for details.

Note that the default colors provided by the `heat.colors` function are not especially attractive or informative; consider using custom-defined colors, for example by using the **RColorBrewer** package.

The output of the `plotChrMap` function can be subsequently used with the `grabChrMapProbes` function which enables the user to identify the probes or genes responsible for heatmap bands of interest.

Note that the `layout` and `par` options for the current graphics device are *not* reset following generation of the image. This is so that the `grabChrMapProbes` function can accurately identify the region of interest when the user interactively clicks on the diagram.

## 4 Interactive probe/gene identification

Often it will be of interest to determine exactly which probes or genes are shown to be up- or down-regulated by the `plotChrMap` heat map. This can be done using the `grabChrMapProbes` function. This takes the output of the `plotChrMap` function, asks the user to mouse-click the heatmap on either side of the bands of interest and returns a character vector of the locus identifiers in that region. These can then be passed to the **AnnotationDbi** function `mget` to identify which genes are being differentially expressed.

```
> probes <- grabChrMapProbes( plotmap )
> genes <- unlist(mget(probes, envir=hgu95av2SYMBOL, ifnotfound=NA))
```

Note that due to the way the expression values are plotted, genes which lie very close to each other on the chromosome may have been averaged to give a signal that could be usefully plotted at screen resolution. In such cases the locus identifiers will be returned concatenated, separated by semicolons (e.g. “37687\_i\_at;37688\_f\_at;37689\_s\_at”). Typically this is easily solved by zooming in on a region of interest, using either the “cytoband” or “start” and “end” options to `plotChrMap`. See also the “interval” option for another approach to this problem.

## 5 Session information

The version number of R and packages loaded for generating the vignette were:

```
R version 4.5.1 Patched (2025-08-23 r88802)
```

```
Platform: x86_64-pc-linux-gnu
```

```
Running under: Ubuntu 24.04.3 LTS
```

```
Matrix products: default
```

```
BLAS: /home/biocbuild/bbs-3.22-bioc/R/lib/libRblas.so
```

```
LAPACK: /usr/lib/x86_64-linux-gnu/lapack/liblapack.so.3.12.0 LAPACK version 3.12.0
```

```
locale:
```

```

[1] LC_CTYPE=en_US.UTF-8      LC_NUMERIC=C
[3] LC_TIME=en_GB             LC_COLLATE=C
[5] LC_MONETARY=en_US.UTF-8   LC_MESSAGES=en_US.UTF-8
[7] LC_PAPER=en_US.UTF-8      LC_NAME=C
[9] LC_ADDRESS=C              LC_TELEPHONE=C
[11] LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C

```

```

time zone: America/New_York
tzcode source: system (glibc)

```

attached base packages:

```

[1] stats4      stats      graphics  grDevices  utils      datasets  methods
[8] base

```

other attached packages:

```

[1] hgu95av2.db_3.13.0    org.Hs.eg.db_3.21.0    ChromHeatMap_1.63.0
[4] annotate_1.87.0        XML_3.99-0.19          AnnotationDbi_1.71.1
[7] IRanges_2.43.5         S4Vectors_0.47.4       ALL_1.51.0
[10] Biobase_2.69.1         BiocGenerics_0.55.1    generics_0.1.4

```

loaded via a namespace (and not attached):

```

[1] SparseArray_1.9.1      bitops_1.0-9
[3] RSQLite_2.4.3          lattice_0.22-7
[5] grid_4.5.1             fastmap_1.2.0
[7] blob_1.2.4             Matrix_1.7-4
[9] restfulr_0.0.16        DBI_1.2.3
[11] httr_1.4.7             Biostrings_2.77.2
[13] codetools_0.2-20       abind_1.4-8
[15] cli_3.6.5              rlang_1.1.6
[17] crayon_1.5.3           XVector_0.49.1
[19] bit64_4.6.0-1          cachem_1.1.0
[21] DelayedArray_0.35.3    yaml_2.3.10
[23] S4Arrays_1.9.1         tools_4.5.1
[25] parallel_4.5.1         BiocParallel_1.43.4
[27] memoise_2.0.1          Rsamtools_2.25.3
[29] SummarizedExperiment_1.39.2 curl_7.0.0
[31] vctrs_0.6.5            R6_2.6.1
[33] png_0.1-8              BiocIO_1.19.0
[35] matrixStats_1.5.0      rtracklayer_1.69.1
[37] KEGGREST_1.49.1        Seqinfo_0.99.2
[39] bit_4.6.0              pkgconfig_2.0.3
[41] GenomicRanges_1.61.5   GenomicAlignments_1.45.4
[43] MatrixGenerics_1.21.0  xtable_1.8-4
[45] rjson_0.2.23           compiler_4.5.1
[47] RCurl_1.98-1.17

```