

Examples for the qTable function

Enrico Schumann
es@enricoschumann.net

We attach the package and create some random data.

```
> require("NMOF")
> x <- rnorm(100L, mean = 0, sd = 1.5)
> y <- rnorm(100L, mean = 1, sd = 1)
> z <- rnorm(100L, mean = 1, sd = 0.5)
> X <- cbind(x, y, z)
> summary(X)
```

x	y	z
Min. :-4.7443	Min. :-1.691	Min. :-0.400
1st Qu.:-1.0280	1st Qu.: 0.349	1st Qu.: 0.693
Median :-0.0098	Median : 0.972	Median : 1.026
Mean :-0.0492	Mean : 0.941	Mean : 1.001
3rd Qu.: 1.0217	3rd Qu.: 1.670	3rd Qu.: 1.350
Max. : 3.0466	Max. : 3.196	Max. : 2.232

A call to qTable could like this, and it will result in the \LaTeX output below.

```
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
             circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2))
  median  min  max
x  -0.01 -4.74 3.05
y   0.97 -1.69 3.20
z   1.03 -0.40 2.23
```

-10 -5 0 5 10

If you use Sweave, use `<<results=tex>>=` to start a code chunk.

Examples

```
> ## with limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2))
```

	median	min	max
x	-0.01	-4.74	3.05
y	0.97	-1.69	3.20
z	1.03	-0.40	2.23

```
> ## without specified limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, dec = 2))
```

	median	min	max
x	-0.01	-4.74	3.05
y	0.97	-1.69	3.20
z	1.03	-0.40	2.23

```
> ## 3 digits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, dec = 3))
```

	median	min	max
x	-0.010	-4.744	3.047
y	0.972	-1.691	3.196
z	1.026	-0.400	2.232

```
> ## specific labels, but no limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           labels = c(-8,2,8), at = c(-8,2,8),
           circlesize = 0.0125, dec = 1))
```

	median	min	max
x	-0.0	-4.7	3.0
y	1.0	-1.7	3.2
z	1.0	-0.4	2.2


```
> ## specific labels and limits, linethickness
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           labels = c("a","b","c"), at = c(-8,2,8),
           circlesize = 0.02, dec = 1, linethickness = "0.2ex",
           xmin = -10, xmax = 10))
```

	median	min	max
x	-0.0	-4.7	3.0
y	1.0	-1.7	3.2
z	1.0	-0.4	2.2

```

> ## specific labels and limits, linethickness
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  labels = c("a","b","c"), at = c(-8,2,8),
  circlesize = 0.02, dec = 1, linethickness = "0.2ex",
  xmin = -10, xmax = 10))


```

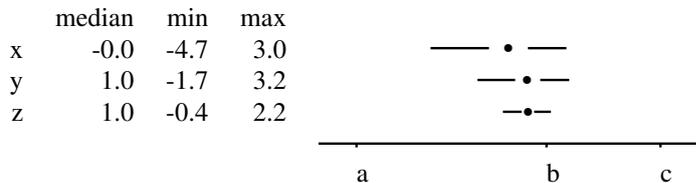

```

> ## with limits and alternative functions
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2,
  funs = list(average = mean,
    q10 = function(x) quantile(x, 0.1),
    q90 = function(x) quantile(x, 0.9))))

```

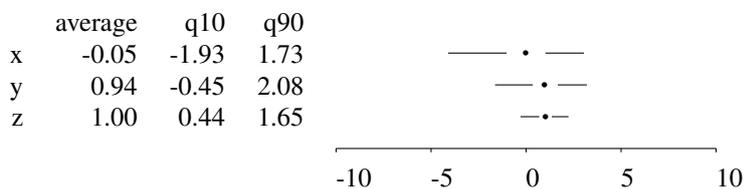

```

> ## with limits and without summary stats
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2,
  funs = list()))

```

