

The “ArealSampling” Class

Jeffrey H. Gove*
Research Forester
USDA Forest Service
Northern Research Station
271 Mast Road
Durham, New Hampshire 03824 USA
e-mail: jgove@fs.fed.us or e-mail: jhgove@unh.edu

Thursday 15th December, 2011
4:51pm

Contents

1	Introduction	1	4.2	Object creation	7
2	The “ArealSampling” Class	2	5	The “perpendicularDistance” Class	8
2.1	Class slots	3	5.1	“perpendicularDistance” Class slots	8
3	The “circularPlot” Class	3	5.2	Object creation	9
3.1	“circularPlot” Class slots	4	6	The “distanceLimited” Class	10
3.2	Object creation	4	6.1	“distanceLimited” Class slots	10
3.3	Plotting the object	5	6.2	Object creation	10
4	The “pointRelascope” Class	5	7	The “angleGauge” Class	11
4.1	“pointRelascope” Class slots	6	7.1	“angleGauge” Class slots	11
			7.2	Object creation	12
			Bibliography		12

1 Introduction

The “ArealSampling” class is a virtual class that is used as a basis for each of the possible different areal sampling methods we use in forestry, whether for down logs or standing trees. For each of the subclasses, relevant information defining the sampling method should be given that will allow the computation of its associated inclusion zone later in the “InclusionZone” class. Because most areal sampling methods also depend on the attributes of the “Stem” subclass that represents it (i.e., the inclusion zone for PPS methods especially are of this form), most subclasses will not have any “SpatialPolygons” slot available for rendering the object graphically. One obvious exception is with fixed-radius plots under, e.g., the ‘standup’ method (Gove and Van Deusen, 2011). In addition, since

*Phone: (603) 868-7667; Fax: (603) 868-7604.

‘standup,’ ‘chainsaw,’ and ‘sausage’ are simply protocol differences within the fixed-area circular plot method of sampling, we do not differentiate them here, but wait until the “InclusionZone” class to make that distinction.

An overview of the “ArealSampling” class structure is presented in Figure 1. At this point it is uncertain whether there will be a division between standing tree and down log methods. Such a division is somewhat artificial as some of the methods, such as circular plot sampling, can be used on both, and it would be redundant to have them defined twice. But we can always have a “joint” subclass, encompassing these methods, or just let them hang by themselves as necessary. At this point in the design, none of these changes should impact what is already completed. Furthermore, it

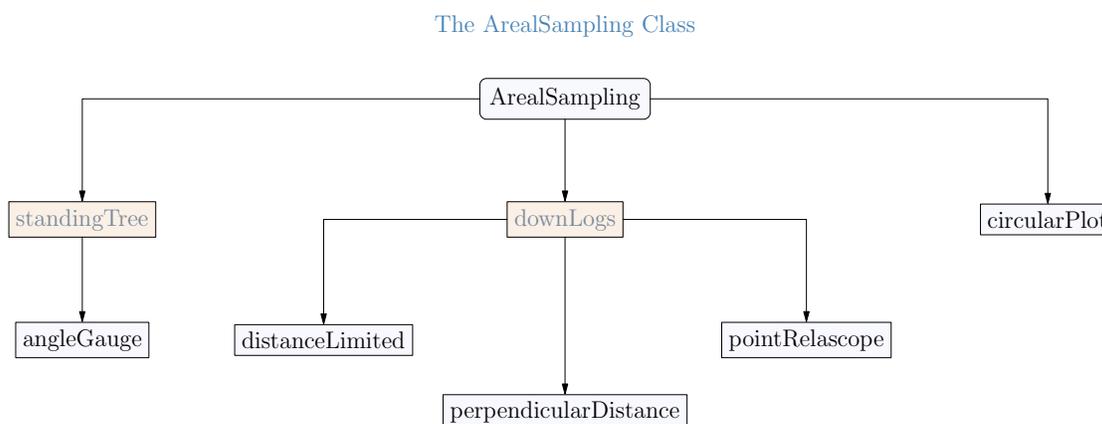


Figure 1: An overview of the “ArealSampling” class.

should be kept in mind that protocols within sampling methods, such as the “sausage” or “standup” protocols for down coarse woody debris (Gove and Van Deusen, 2011), are not “ArealSampling” methods per se. They could be defined as subclasses of the “circularPlot” class, but they really are characterized by their inclusion zones, and so we leave their definition for the “InclusionZone” class. In any case, if the divisions were to arise in further work, they would be defined as virtual classes, as they are in the “InclusionZone” class.

2 The “ArealSampling” Class

As mentioned above, this is the virtual base class, therefore, we really only care about its slots so we can see what will transfer to subclasses...

```
R> getClass('ArealSampling')
```

```
Virtual Class "ArealSampling" [package "sampSurf"]
```

```
Slots:
```

```
Name:  description      units
Class: character        character
```

```
Known Subclasses: "circularPlot", "pointRelascope", "perpendicularDistance", "distanceLimited",
"angleGauge"
```

2.1 Class slots

- *description*: Some descriptive text about the object.
- *units*: A character string specifying the units of measure. Legal values are “English” and “metric.”

3 The “circularPlot” Class

This is a subclass of “ArealSampling”, for fixed-area circular plots. It shares all the slots of the virtual class; furthermore, it defines the following additional slots...

```
R> showClass('circularPlot')
```

```
Class "circularPlot" [package "sampSurf"]
```

```
Slots:
```

```
Name:      radius      area      perimeter      location
Class:     numeric     numeric SpatialPolygons SpatialPoints
```

```
Name:      spID      spUnits      description      units
Class:     character  CRS          character        character
```

```
Extends: "ArealSampling"
```

3.1 “circularPlot” Class slots

The extra slots are defined as follows...

- *radius*: The fixed-plot radius in the correct units.
- *area*: The area of the plot in the correct units.
- *perimeter*: The “SpatialPolygons” object corresponding to the perimeter of the fixed-radius plot.
- *location*: This is a “SpatialPoints” representation of the location of the object. In the “circularPlot” class, this is the fixed-radius plot center, which will often correspond to the `location` slot in the “Stem” object under sampling surface simulations. But there are exceptions: for example, under the ‘standup’ method, it will be at the large-end of the log, while under the ‘chainsaw’ method, it will be some point within the “sausage” shaped inclusion zone for protocol 1 in (Gove and Van Deusen, 2011).
- *spID*: A unique identifier that will be used in the eventual “SpatialPolygons” representation of the object.
- *spUnits*: A valid string of class “CRS” denoting the spatial units coordinate system (?CRS for more information) as in package `sp`.

3.2 Object creation

One can use `new` to create a new object. However, as with other classes defined in `sampSurf`, the class is sufficiently tedious to create this way that a constructor function of the same name is provided. For example...

```
R> cp = circularPlot(37.237, units='English', center=c(x=10,y=3))
R> summary(cp)
```

```
Object of class: circularPlot
```

```
-----
fixed area circular plot
-----
```

```
ArealSampling...
```

```
  units of measurement: English
```

```
circularPlot...
```

```
radius = 37.237 feet
area = 4356.1141 square feet (0.1 acres)
spatial units: NA
spatial ID: cp:o5i4u3e6
location (plot center)...
  x coord: 10
  y coord: 3
Number of perimeter points: 101 (closed polygon)
```

The arguments for the constructor are detailed in the help page (`?circularPlot`). However, as an example, we see from the above `summary` output that the number of points defining the perimeter of the plot in the “SpatialPolygons” object is given. It is in fact an argument to the constructor so the plot object can be created with as fine a perimeter of points as desired. The result will always be one more point than what is specified for the argument (default is 100 points), as it is necessary to close the polygon by repeating the starting point.

3.3 Plotting the object

The `plot` generic function has also been extended to be able to handle plotting of the objects of the “circularPlot” class. The arguments are again detailed in the help page, but here is a simple example...

```
R> plot(cp, axes=TRUE, showPlotCenter=TRUE, cex=2)
```

In Figure 2, the `cex` argument specifies the size of the symbol for the plot center; other `par` arguments can also be included.

4 The “pointRelascope” Class

This subclass of “ArealSampling” is used for point relascope sampling (Gove et al. 1999, Gove et al. 2001). As usual, it shares all the slots of the virtual class; in addition, it defines the following extra slots...

```
R> showClass('pointRelascope')
```

```
Class "pointRelascope" [package "sampSurf"]
```

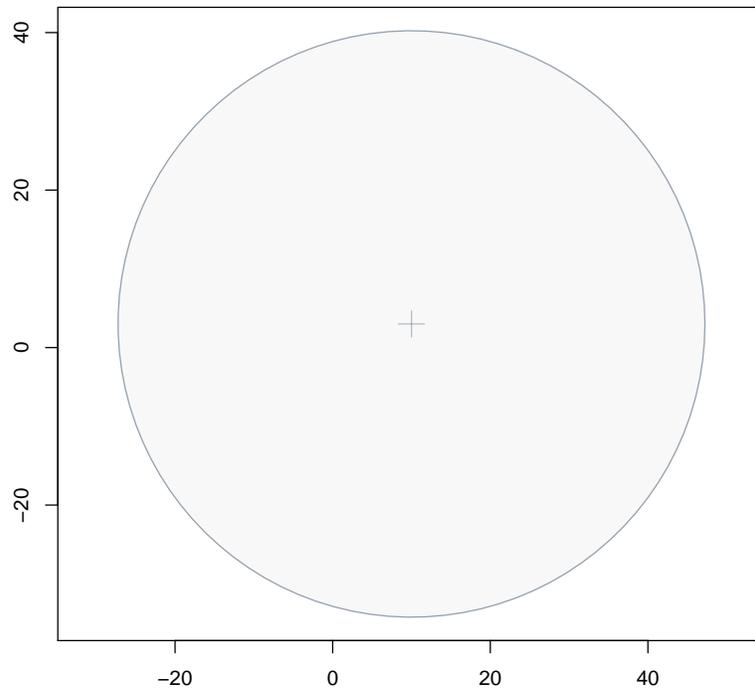


Figure 2: A “circularPlot” object.

Slots:

Name:	angleDegrees	angleRadians	phi	slFactor	rwFactor
Class:	numeric	numeric	numeric	numeric	numeric

Name:	description	units
Class:	character	character

Extends: "ArealSampling"

4.1 “pointRelascope” Class slots

The extra slots are defined as follows...

- *angleDegrees*: The relascope angle in degrees such that $0 < \nu \leq 90^\circ$.
- *angleRadians*: The relascope angle in radians.
- *phi*: The area factor multiplier, φ , for angle ν , as described in the above references.
- *slFactor*: The squared length factor, \mathcal{L} , defining the constant amount of length-square per unit area (acre or hectare) as described in the above references.
- *rwFactor*: The reach:width ratio or factor that makes it simpler to keep track of some of the more useful relascope angles, especially when constructing a relascope.

4.2 Object creation

Once again, one can use `new` to create a new object. However, it is unnecessary and can cause problems if your conversions are not correct. Therefore, a constructor with the same name as the class has been provided; e.g. . . .

```
R> (angle = .StemEnv$rad2Deg(2*atan(.5)))
```

```
[1] 53.130102
```

```
R> prs = pointRelascope(angle, units='English')
```

```
R> prs
```

```
Object of class: pointRelascope
```

```
-----  
point relascope method  
-----
```

```
ArealSampling...
```

```
  units of measurement: English
```

```
pointRelascope...
```

```
  Angle (nu) in degrees = 53.130102
```

```
  Angle (nu) in radians = 0.92729522
```

```
  PRS area factor (phi) = 2.1049199
```

```
  PRS squared-length factor (L) = 20694.374 square feet per acre
```

```
  This angle has a 2:1 reach:width factor
```

The first line deduces the angle that exactly (to **R**’s precision) corresponds to the 2:1 reach:width relascope angle. This is subsequently used in the second line to generate an object of the class. Lastly, we see the newly created object’s summary.

There is no spatial information in this class, so there is nothing graphical to plot. The graphical inclusion zones will be created when a “pointRelascope” object is coupled with a “downLog” object.

5 The “perpendicularDistance” Class

This subclass of “ArealSampling” is used for perpendicular distance sampling (Williams and Gove 2003, Williams et al. 2005, Ducey et al. 2008). As usual, it shares all the slots of the virtual class; in addition, it defines the following extra slots...

```
R> showClass('perpendicularDistance')
```

```
Class "perpendicularDistance" [package "sampSurf"]
```

```
Slots:
```

```
Name:      factor      kpds description      units
Class:     numeric     numeric  character      character
```

```
Extends: "ArealSampling"
```

5.1 “perpendicularDistance” Class slots

The extra slots are defined as follows...

- *factor*: This is the volume, surface area or coverage area factor. At this point, it makes no difference which method we are going to use it for. The only thing this effects is its interpretation in terms of units.
- *kpds*: The perpendicular distance factor K_{PDS} as found in the references. Again, it makes no difference other than the interpretation in terms of units as to which method we are going to apply it at this point.

5.2 Object creation

Once again, one can use `new` to create a new object. However, it is unnecessary and can cause problems if your conversions are not correct. Therefore, a constructor with the same name as the class has been provided. The constructor wants the K_{PDS} factor as the first argument; e.g.,...

```
R> lpds = lapply(c(435.6, 217.8), perpendicularDistance, units='English')
R> sapply(lpds, class)
```

```
[1] "perpendicularDistance" "perpendicularDistance"
```

```
R> t(sapply(lpds, function(x) c(x@factor, x@kpds)))
```

```
      [,1] [,2]
[1,]   50 435.6
[2,]  100 217.8
```

```
R> (pdsEng = perpendicularDistance(10, units='English'))
```

```
Object of class: perpendicularDistance
```

```
-----
perpendicular distance method
-----
```

```
ArealSampling...
```

```
  units of measurement: English
```

```
perpendicularDistance...
```

```
  kPDS factor = 10 per foot [dimensionless] for volume [surface/coverage area]
```

```
  volume [surface/coverage area] factor = 2178 cubic feet [square feet] per acre
```

The first three lines simply make two “perpendicularDistance” objects with different factors and then print a simple table of these. The last line shows how to create single “perpendicularDistance” object, and prints the summary showing the interpretation of the slots.

6 The “distanceLimited” Class

This subclass of “ArealSampling” is used for distance limited PDS (DLPDS) (Ducey et al., 2012) and distance limited Monte Carlo sampling (DLMCS) (Gove et al., 2012). As usual, it shares all the slots of the virtual class; in addition, it defines the following slot...

```
R> showClass('distanceLimited')
```

```
Class "distanceLimited" [package "sampSurf"]
```

```
Slots:
```

```
Name: distanceLimit  description      units
Class:      numeric    character    character
```

```
Extends: "ArealSampling", "dlsNumeric"
```

6.1 “distanceLimited” Class slots

The extra slots are defined as follows...

- *distanceLimit*: This is simply the design distance limit to be imposed on the sampling method, and hence on the “InclusionZone” object that is created from it.

6.2 Object creation

Once again, using `new` is unnecessary as a constructor with the same name as the class has been provided. The constructor wants the distance limit as the first argument; e.g.,...

```
R> distanceLimited(10, units='English')
```

```
Object of class: distanceLimited
```

```
-----
distance limited method
-----
```

```
ArealSampling...
  units of measurement: English
```

```
distanceLimited...
  Distance limit = 10 feet
```

7 The “angleGauge” Class

All of the methods presented above, with the exception of the “circularPlot” class are for sampling downed logs. This class, is for use in sampling standing trees. While similar to the “pointRelascope” class, the allowable angles are different, and there are other non-conforming slots so they have been separated into two distinct classes. The following slots are part of this class...

```
R> showClass('angleGauge')
```

```
Class "angleGauge" [package "sampSurf"]
```

```
Slots:
```

```
Name: angleDegrees angleRadians      baf      prf      PRF
Class:      numeric      numeric      numeric      numeric      numeric
```

```
Name:      alpha  description      units
Class:      numeric  character      character
```

```
Extends: "ArealSampling"
```

7.1 “angleGauge” Class slots

The extra slots beyond what is in the virtual base class are defined as follows...

- *angleDegrees*: The gauge angle in degrees. The current acceptable range is $0 < \nu \leq 6.5$ degrees.
- *angleRadians*: The corresponding gauge angle in radians.
- *baf*: The basal area factor in the correct units for English (ft²/acre) or metric (m²/hectare). The current approximate range corresponding to the angle in degrees above is English: $0 < baf \leq 140$ ft²/acre; metric $0 < baf \leq 32$ m²/hectare.

- *prf*: The plot radius factor: English (ft/in) or metric (cm/m).
- *PRF*: The plot radius factor: English (ft/ft) or metric (m/m).
- *alpha*: The plot radius proportionality factor: English (ft/ft) or metric (m/m).

7.2 Object creation

Once again, using `new` is unnecessary as a constructor with the same name as the class has been provided. The constructor takes the basal area factor as the signature argument; e.g., the following creates an “angleGauge” object with a basal area factor of 10 ft²/acre...

```
R> ag = angleGauge(10, units='English')
R> summary(ag)
```

```
Object of class: angleGauge
```

```
-----
angle gauge method
-----
```

```
ArealSampling...
```

```
  units of measurement: English
```

```
angleGauge...
```

```
  Angle (nu) in degrees = 1.7363022
```

```
  Angle (nu) in radians = 0.03030419
```

```
  Basal area factor (baf) = 10 square feet per acre
```

```
  Plot radius factor (prf) = 2.75 feet per inch (33 feet per foot)
```

```
  This angle has a proportionality factor (alpha) = 66 feet per foot
```

References

- M. J. Ducey, M. S. Williams, J. H. Gove, and H. T. Valentine. Simultaneous unbiased estimates of multiple downed wood attributes in perpendicular distance sampling. *Canadian Journal of Forest Research*, 38:2044–2051, 2008. 8
- M. J. Ducey, M. S. Williams, S. Roberge, R. S. Kenning, and J. H. Gove. Distance limited perpendicular distance sampling for coarse woody material: Theory and field results. *Forestry*, 2012. In Review. 10

- J. H. Gove and P. C. Van Deusen. On fixed-area plot sampling for downed coarse woody debris. *Forestry*, 84(2):109–117, 2011. 1, 2, 4
- J. H. Gove, A. Ringvall, G. Ståhl, and M. J. Ducey. Point relascope sampling of downed coarse woody debris. *Canadian Journal of Forest Research*, 29(11):1718–1726, 1999. 5
- J. H. Gove, M. J. Ducey, A. Ringvall, and G. Ståhl. Point relascope sampling: A new way to assess down coarse woody debris. *Journal of Forestry*, 4:4–11, 2001. 5
- J. H. Gove, M. J. Ducey, and H. T. Valentine. A distance limited method for sampling downed coarse woody debris. *Forest Ecology and Management*, 2012. (In Prep.). 10
- M. S. Williams and J. H. Gove. Perpendicular distance sampling: an alternative method for sampling downed coarse woody debris. *Canadian Journal of Forest Research*, 33:1564–1579, 2003. 8
- M. S. Williams, M. J. Ducey, and J. H. Gove. Assessing surface area of coarse woody debris with line intersect and perpendicular distance sampling. *Canadian Journal of Forest Research*, 35: 949–960, 2005. 8